

CashinEDGE[®] HS

- Higher slicing yields and reduced giveaway
- 2,000 rpm blade speed and over 60 drafts per minute
- Slice count control
- Optimizes slice quality and draft presentation
- Easy to operate and maintain
- Low cost of ownership
- Hygienic design

Integrated Systems

Grinding & Mixing

Separating

Forming


Coating

Heat Treatment

Freezing

Slicing

Autoloading

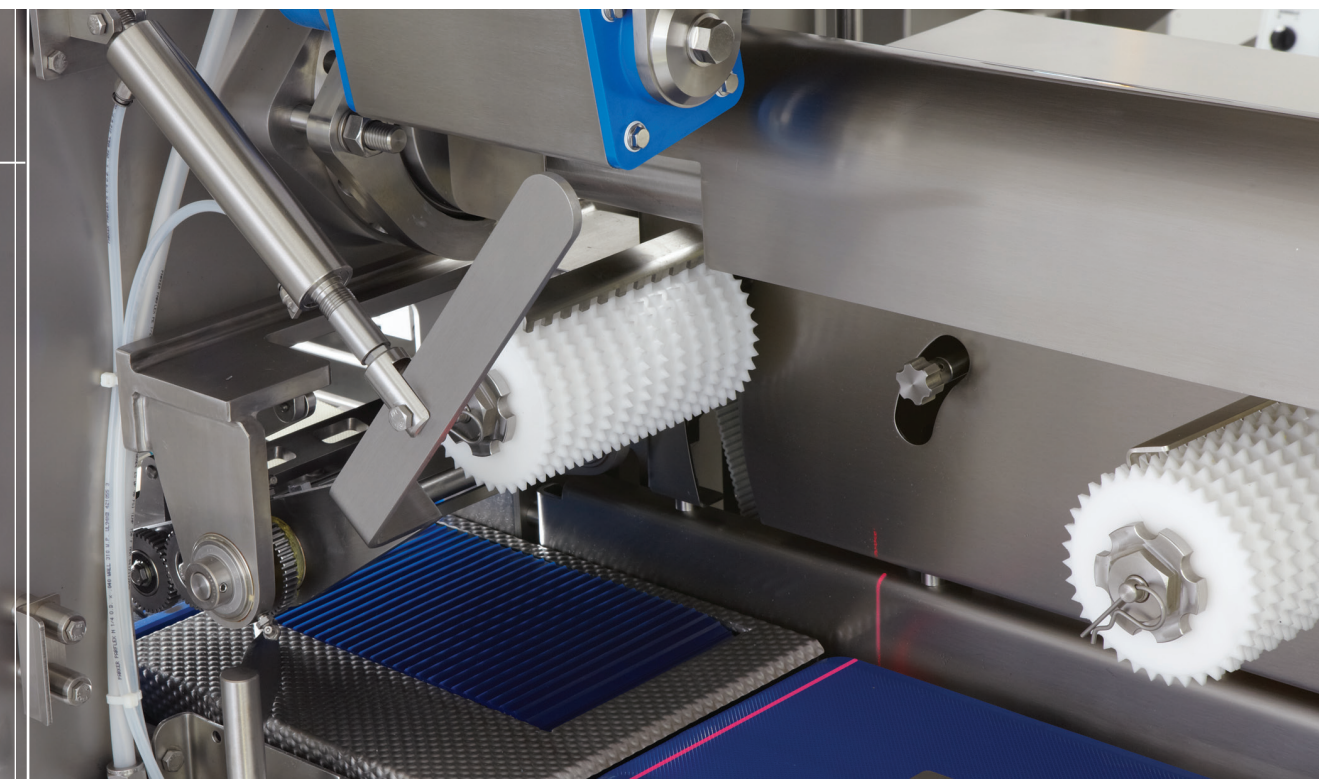

AM2C[®]

Beehive[®]

Cashin[®]

Formax[®]

multitec[™]

TST[™]

Weiler[®]



Engineered for Higher Yields and Slicing

The CashinEDGE® HS gives you the competitive edge when it comes to increased yields, greater throughput and accurate slice count control. The technology advances performance from its user-friendly design and controls to its new product drive system—promising a superior slicing solution. The system's ability to maximize yields and minimize giveaway at high rates of production make the CashinEDGE HS the number one choice of bacon processors everywhere. And the CashinEDGE HS fits seamlessly into new and existing Cashin Bacon System lines.

It's the smart and simple way to slice bacon with the highest performance at the very lowest ownership costs.


User-Friendly Touch Screen Controls

The large touch screen simplifies operation and maintenance. Operation of the machine can be performed from a single screen, while historical operating data is available at the push of a button. Product changeovers are quick and efficient. Overall slicing presentation is optimized through the touch screen input, including the ability to minimize slice thickness variation. Troubleshooting is also made easier with descriptive diagnostic screens.



Precise Drive System

CashinEDGE HS incorporates a timing belt drive system to eliminate backlash and provide precise control of the product as it's delivered to the blade. Sliver slices are eliminated and slice integrity optimized, leading to overall improvement in yield and product presentation. And the system automatically maintains belt tension, reducing the need for frequent adjustments.

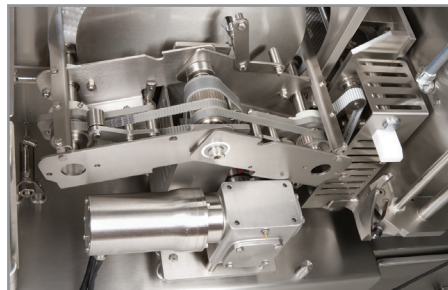



Speeds with Excellent Slice Quality




Profile Sensor

The profile sensor is a sophisticated and reliable system that measures the top contour of the product to help maintain accurate portioning. This critical information is used by the weighing system for a consistent slice count and overall superior weight control. All this adds up to on-weight portion consistency and a level of ultimate precision.



Checkweigher

The checkweigher with touch screen control monitors the slicing operations and interfaces with the Add-A-Slice™ Weighing Systems and its dynamic scales. It ensures precise weight control throughout the production run. The 3-Track Flyte Diverter or classifier sends off-weights to the make weight station automatically.

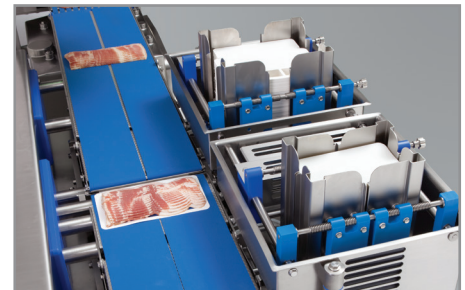

Dual Chambered Servo Card Dispenser

CashinEDGE HS can be set up with a single or dual chambered card dispenser for A and B grade boards. The automatic dispenser places J-boards, including pre-folded boards, under the draft reducing the need for additional labor and handling. J-boards or Carrier boards are loaded from an easily adjustable magazine. All this adds up to superior efficiency and reliability.


CashinEDGE® HS: Faster, higher performance and easier to operate.

CASHINEDGE HS SPECIFICATIONS	
Product size	2.75" x 11.5", 70mm height x 292mm wide
Presentation	Shingle or tight shingle, Up to 3lb packages (1.36kg)
Blade speed	2000 rpm (slicing speed)
Slice thickness	Variable (set via touch screen input)
Touch screen	12" color screen (305mm)
Speed	Over 60 drafts per minute (slice count dependent)
Control platform	Allen-Bradley PLC




Downstream Conveying Options:


TRIPLE TRACK

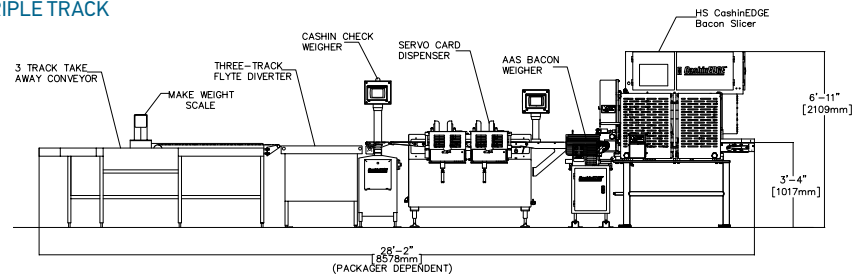


ACCEPT/REJECT CONVEYOR

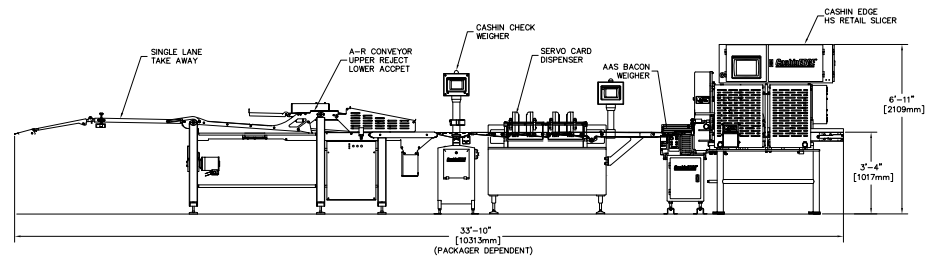

LOAD ASSIST

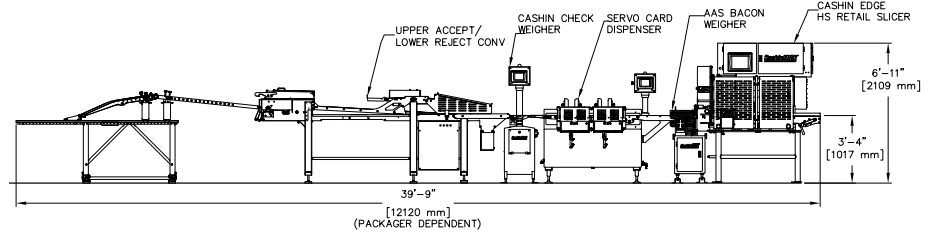

AUTOLOADER

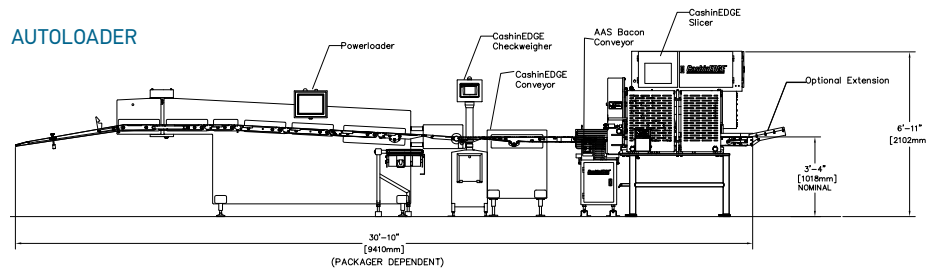

PROVISUR
TECHNOLOGIES

North America
9150 191st Street, Mokena, Illinois 60448 USA
Tel: +1 708-479-3500 Fax: +1 708-479-3598 E-mail: formaxinfo@provisur.com

Europe, Middle East and Africa
Schipholweg 315, 1171 PL Badhoevedorp, The Netherlands
Tel: +31 (0)20 659 08 00 Fax: +31 (0)20 659 08 01 E-mail: eu.info@provisur.com

France
ZI de Kerdroniou 1 rue Marcel Paul, 29000 Quimper, France
Tel: +33 298 948 905 Fax: +33 298 948 905 E-mail: AM2Cinfo@provisur.com

South America
Alameda Venus, 289 American Park Empresarial NR, Indaiatuba, SP 13347-659 Brazil
Tel: +55 (19) 3935-3177 Fax: +55 (19) 3936-2148 E-mail: sa.info@provisur.com

Asia Pacific
11th Floor, Thaniya Building (BTS Wing), 62 Silom Road, Bang Rak Bangkok 10500 Thailand
Tel: +66 (0) 2652 3050 to 51 Fax: +66 (0) 2652 3052 E-mail: ap.info@provisur.com

China
Room 8A, 18 Cao XiBei Rd, XuHui, Shanghai 200030
Tel: +86 21-54241015 Fax: +86 021-54245315 E-mail: info.shanghai@provisur.com

AM2C® Beehive® Cashin® Formax® multitec™ TST™ Weiler®
Integrated Systems Grinding & Mixing Separating Forming Coating Heat Treatment Freezing Slicing Autoloading

provisur.com

©2017 Provisur Technologies, Inc.