

Defrosting Technologies and Solutions

Lutetia[®]

Tumbler Defrosting
Chamber Defrosting





Tumbler Defrosting

Technical principle

- Our dynamic defrosting technology combines steam injection under vacuum and heat*.
- Whatever type of tumbler you use, single or double jacket, the energy can be added directly through live steam injection and/or by direct contact through the energy released by the double jacket drum coil.
- The gradual injection of regulated steam under vacuum enables the transfer of latent heat of steam condensation in a regular and controlled way to avoid any surface cook.
- Thanks to the rotation, which gradually separate the block for a perfect uniform temperature and control of the low vacuum pressure, guarantees the final quality of the product protein.
- Our exclusive radio frequency probe, in contact with the product, manages the temperature through the total process. It controls the double jacket temperature and addition of steam.
- Defrosting may be followed by salting and marination and a complete range of Lutetia operation.

* Patented technology



Radio frequency probe for total control of the product temperature

Product Examples



Pork Leg defrosting



Beef silver side defrosting



Chicken breast defrosting



ROI Example

Example in a tumbler T6 model with 3,000 kg small chicken fillet blocks
2 cycles per day = 6,000 kg

Considering a 6% loss in traditional defrosting method and no loss with the tumbler = 6% gain = 360 kg.

360 kg x 3 €/kg = 1,080 € per day or 21,600 € per month.

150,000 € / 21,600.00 €

Pay back on equipment = 7 months.



Chamber Defrosting

Technical principle cold convection

- Fast defrosting in cold convection optimizes conditions for heat transfer between the temperature of the chamber, the surface and the heart of the product.
- In order to have optimal defrosting using this technique, Lutetia uses two factors:
 - A high air circulation around the rack guaranteed to be identical for all products
 - An energy input with direct low pressure steam or a cold water mist* which ensures the energy transfer.
- The whole process is controlled by a program designed by Lutetia coupled with core and surface temperature probes.
- Temperature control is important in order to guarantee the quality and hygiene of the product.
- This Lutetia static process respects the most fragile product.

* Patented technology

Products



20 kg block chicken fillet defrosting



Pork fillet defrosting



Sea bass and king prawn defrosting



On a rack or in a tray product

ROI Example

Example in a 2 trolley chamber model DGV2 with 10 kg chicken fillet blocks.
 500 kg per trolley = 1,000 kg per batch x 3 batches a day = 3,000 kg per 24 hours.
 Considering a 6% loss with traditional method and 1% loss with the chamber = 5% gain = 150 kg.
 150 kg x 3 €/kg = 450 € per day or 9,900 € per month.
 56,000 € / 9,900 €
 Pay back on equipment = 6 months.



Experts in defrosting

In response to the global growing demand for rapid defrosting, giving total control over the quality and the safety of foods, Provisur has developed various patented optimized defrosting procedures.

Global advantages of the Lutetia systems

- The rationalization of production in accordance with orders.
 - Regular, from one cycle to another, via the management of defrosting conditions
 - Total process control by the PLC
- The productivity for:
 - Yield improvement or reduction of losses
 - Fast defrosting time reduced from 24 to 96 hours to 4 to 12 hours
 - Footprint reduction, optimization of the space into the factory
 - Maximum versatility
- Reduced cost and environmental impact:
 - Low energy consumption
 - Low water consumption
- Safety and Hygiene:
 - The defrosting techniques implemented require a hazard analysis to be carried out. As freezing simply stops bacterial growth, bacteria recover during thawing and are ready to grow hence the importance of providing rapid thawing techniques with continuous temperature controls
 - Excellent control of temperatures surface
 - Easy to clean system



The Lutetia tumbler gives a uniform product temperature through process rotation with yield increase from 4–8 %.

Versatile to any product with cumulative operations.

**Defrosting + Maturation = Yield
Productivity Optimization**



Advantage of the Lutetia chamber: Limited modification of the product. Flexible and perfectly adapted to fragile materials such fish and other large block.

Technology, Design & Engineering



Loading and unloading systems

Our global experience has helped us to develop the right solution.

- Pneumatic loader
- Hydraulic loader
- Conveyor systems

All our systems for loading are fast, simple, easy to use and totally safe for your operators.


Improve the overall productivity for the product.

Process Monitoring and Performance

Supervision has been created to give you total access to the data recording. Some data points to collect include:

- Batch number
- Date and starting time
- Name of operator with different access degree and automatic display by mail
- All alarm or fault to operator with automatic display by mail in case of fault
- Vacuum level
- Pressure
- Temperature
- Automatic end cycle report
- Connectivity 4.0

Data is available to be viewed on phone, tablet, or PC. Possibility of direct connection to SCADA with server OPC or ethernet IP. Technical assistance with equipment connected to the ethernet network of the factory.

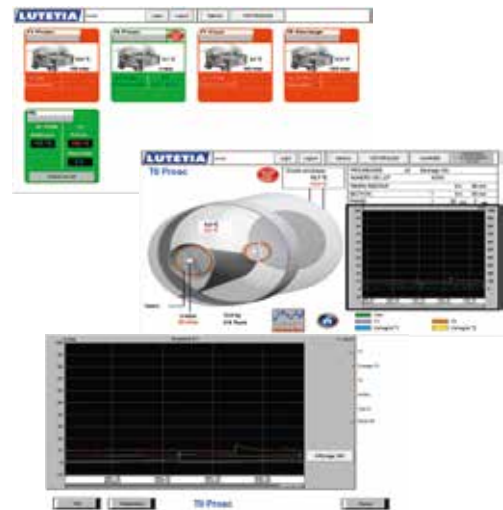

Aftermarket service

Lutetia has extensive stock of spare parts and experienced service technicians always available. Support and spares parts can be supplied without delay.

R & D center

The Provisur Ingenuity Center (EU) is the main food process research tool for Provisur. With a complete range of processing equipment our most advanced technologies give our customer the best solutions for their process and product. A full team for process development and validation, investigation and resolution of manufacturing issues.

Design office

With a team of experienced engineers dedicated to design and development, Lutetia is well placed to maintain position in tumbler performance and technology:

- Safety and hygienic design advances
- Integrating tumblers into food manufacturing processes
- Optimisation of production methods
- Design improvements and new applications

Range of Models & Capacity

TUMBLERS		model									
			Type 1	Type 2	Type 3	Type 4	Type 40	Type 400	Type 5	Type 6	Type 7
Frozen meat capacity	(lb)		485	992	1,653	2,200	2,645	3,306	4,850	7,275	8,377
Floor area	(ft²)		28.9	36.7	45.1	52.2	64.6	76.4	87.5	111.9	114.6
Power excluding generator	(kW)		3.5	3.5	5.9	5.9	7.0	7.0	7.0	10.2	10.2
Indicative maximum daily capacity.											
up to 5 cycles with IQF product	(lb)		2,425	4,960	8,267	11,020	13,227	16,530	24,250	36,376	41,888
2 to 3 cycles with blocks of 5 to 10 kg	(lb)		1,455	2,976	4,960	6,614	7,936	9,920	14,550	21,825	25,132
1 to 2 cycles with blocks of 10 to 20 kg	(lb)		970	1,980	3,306	4,409	5,291	6,614	9,700	14,550	16,755

CHAMBERS				Number of trolleys in line or side by side model									
				Type 1	Type 2	Type 3	Type 4	Type 5	Type 6	Type 7	Type 8	Type 10	
Frozen meat capacity	IQF	Small	(lb)	165	331	496	661	827	992	1,157	1,323	1,653	
		Large	(lb)	551	1,102	1,653	2,205	2,756	3,307	3,858	4,409	5,512	
	Blocks	Small	(lb)	661	1,323	1,984	2,646	3,307	3,968	4,630	5,291	6,614	
		Large	(lb)	1,102	2,205	3,307	4,409	5,512	6,614	7,716	8,818	11,023	
Floor area		(ft²)	22.0	39.7	57.5	75.2	93.0	110.8	128.5	146.3	181.8		
Electrical power excl. heat		(kW)	4	7	10	13	16	19	22	25	31		
Steam heat power		(lb/h)	33	55	66	88	110	132	160	198	220		
Indicative maximum daily capacity.													
up to 8 cycles with small IQF product		(lb)	1,300	2,600	4,000	5,300	6,600	7,900	9,300	10,600	13,200		
4 cycles with small size block		(lb)	650	1,300	2,000	2,600	3,300	4,000	4,600	5,300	6,600		
1 cycle with large block		(lb)	1,100	2,200	3,300	4,400	5,511	6,600	7,700	8,800	11,000		



Lutetia SAS
 Z.A. du Pré de la Dame Jeanne
 60 128 Plailly - FRANCE

Tél . +33 (0)344 607 000
 Fax. +33 (0)344 607 001

www.provisur.com
 Lutetia.info@provisur.com